




ISO 9001 Certified

## H-8000C-D1T-WB/HB-8000C-D1T-WB

1.0 GPF

Concealed Urinal/ Top Spud with Wall Box

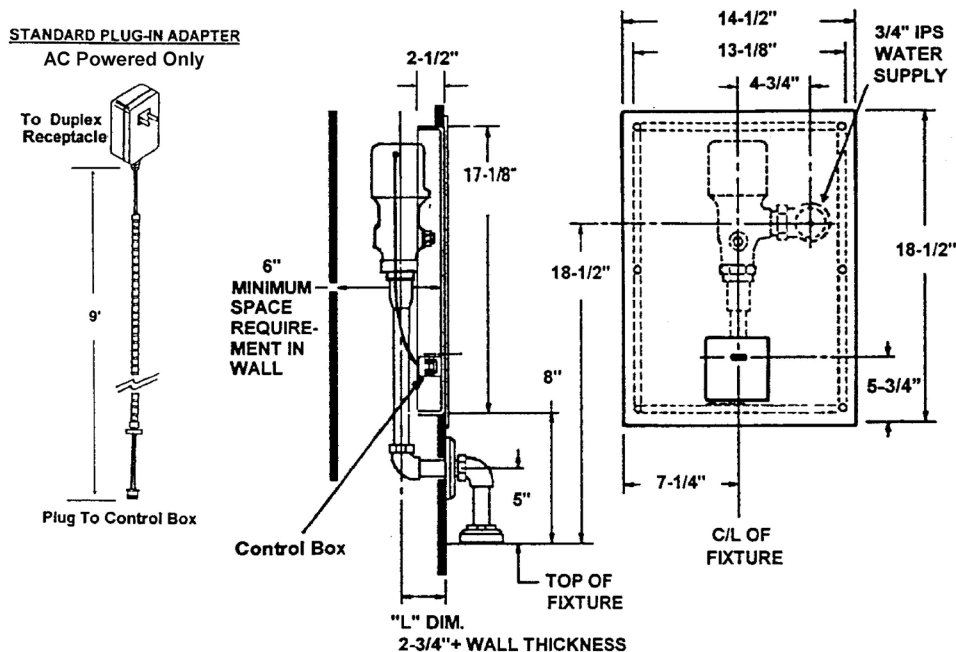

### Description

This smooth and quiet concealed flush valve for urinal is equipped with adjustable sensor, rough brass finish, solenoid operator, adjustable tailpiece, vacuum breaker,  $\frac{3}{4}$ " IPS Angle Stop, elbow flush connection, spud connection for  $\frac{3}{4}$ " Top Spud. Exposed flush valve parts are chrome plated. Includes Stainless Steel Wall Box and Cover Plate.

### Standard Package Includes

- (1) Flush Valve (Rough Brass Finish)
- (1)  $\frac{3}{4}$ " Angle Stop Valve (Rough Brass Finish)
- (1) Sweat Solder Kit
- (1) Vacuum Breaker / Flush Tube
- (1)  $\frac{3}{4}$ " Top Spud ELL Connection
- (1) Top Spud Coupling with Wall Flange
- (1) Electronic Control Box with Sensor
- (1) Plug-in Power Adapter (AC Powered)
- (4) AA Alkaline Batteries with Battery Holder (Battery Powered)
- (1) 13" X 17" Stainless Steel Wall Box with Cover Plate and Vandal Resistant Screws.

### Optional Accessories (AC Powered)

- HC-010 Multi-unit power adapter. Powers up to 8 flush valve units up to 100 feet.
- Manual over-ride button

### Plumbing Specifications

Model	Fixture	Supply	Spud	Flow Rate
H-8000C-D1T	Urinal	$\frac{3}{4}$ "	$\frac{3}{4}$ " Top	1.0 GPF
HB-8000C-D1T	Urinal	$\frac{3}{4}$ "	$\frac{3}{4}$ " Top	1.0 GPF

### Electrical Specifications

- Control Circuit:
  - Solid State
  - Input: 12 VDC (AC), 6 VDC (Battery)
  - Output: 6 VDC
  - 3 second arming delay
  - 1 second flush delay
  - 36 hour sentinel flush
- Power Source (AC Powered):
  - Standard plug-in adapter with 9' output cord
    - Input: 120V AC, Output: 12V DC 800 mA
    - Class II, UL Listed
  - Optional multi-unit adapter
    - Input: 120V AC, Output: 12V DC 3A
    - Class II, UL Listed
- Power Source (Battery Powered):
  - (4) AA Alkaline Batteries

### Wall Box Specifications

- Frame: 13" X 17" X 2" #15 Gauge 304 SS
- Cover Plate: 14 $\frac{1}{2}$ " X 18 $\frac{1}{2}$ " #14 Gauge 304 SS with #4 finish

**HYDROTEK INTERNATIONAL, INC.**  
5055 Forsyth Commerce Rd., Ste 124  
Orlando, FL 32807  
800.922.9883 (Phone)  
866.670.5580 (Fax)  
www.hydrotekintl.com

