



Sensor Faucets and Flush Valves

2710 Series

AC or Battery Powered Sensor Operated Faucet

The 2710 Series faucet is a single-hole deck mounted, piston operated sensor faucet that provides a vandal resistant, lead free, no touch solution that promotes better hygiene and energy savings.

The sensor included in this faucet is self adapting, meaning manual adjustments are not necessary.

- **ADA Compliant.** Meets all barrier free codes
- Conserves water and energy
- Easily installed in new or retrofit applications
- Competitively priced for today's commercial market
- Promotes cleanliness & hygiene
- Proven Hydrotek craftsmanship and reliability
- Lead Free

Features

- Proprietary **Enduratek** energy saving design allows up to 1.5 million on/off cycles.
- Vandal resistant faucet body with chrome plated, solid metal construction with optional brushed gold and matte black finishes.
- Available in AC powered and battery powered versions.
- Unique, energy-saving design of electronics and solenoid valve contributes to longer battery life without water hammer.
- "Self-adapting" sensor distance adjustment eliminates the need for manual sensor adjustments.
- Auto time-out feature to prevent sink overflow. Preset at 30 seconds.
- Includes in-line filter adapter for easier cleaning.
- Low battery indicator light (battery powered models).
- Superior VSI silicone elastomer piston seals are unaffected by chlorine, chloramines, or ammonia.
- Standard 1.0 GPM flow control for water conservation and annual savings.
- Single-hole deck mount with optional 4" and 8" cover plate for vandal resistant three point anchoring.
- Wall mountable, waterproof control box with armored, vandal resistant cables.
- Shut-off delay is preset to 0.5 seconds.



Compliances & Certifications



- ADA Compliant
- ASME A112.18.1
- NSF/ANSI Standard 372 - Lead Free Compliant
- USGBC Member

Available Models

- H-2710-LR:** Lead Free, AC Powered
- HE-2710-LR:** Lead Free, Battery Powered with Enduratek

Special Finishes

- Brushed Gold (-BG)
- Matte Black (-MB)
- Additional Finishes Upon Request



The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com




Sensor Faucets and Flush Valves

2710 Series

AC or Battery Powered Sensor Operated Faucet

Deck Mounted

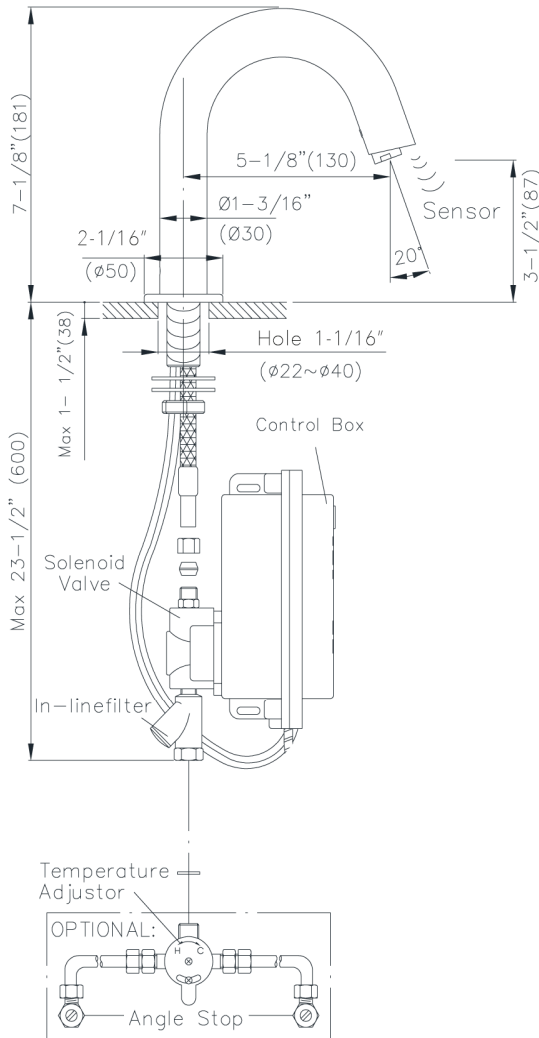

Specifications:

- Faucet Construction: Solid brass, chrome plated
- Control Circuit:
 - Auto. Time-out: 30 seconds
 - Sensor Range: Self adapting
 - Shut-off Delay: 0.5 seconds
 - Line Purge (request only): 5, 15, 30, 60 seconds every 4, 12, or 24 hours
- Solenoid Valve: 6V DC, normally closed
- Wattage: 0.2W (idle), 3W (in use)
- Operating Pressure: 5 psi to 125 psi
- Flow Control: 1.0 GPM Laminar, vandal resistant

AC Mode

- Power Adapter
 - Standard Plug-in: Input AC 100-240VAC (UL/CSA) Output DC 15V, 0.8A
- Optional Multi-Unit Adapter: Serves up to 8 faucets (UL/CSA) Input AC 120V, Output DC 7.5V, 3A

Battery Mode with Enduratek

- Battery Powered Models: (4) AA Alkaline Batteries
- Enduratek Service Life: **1.5 million on/off cycles, up to 10 years**

Package Includes:

- (1) Faucet with sensor/solenoid
- (1) Control box with 6V DC solenoid
- (1) Armored steel supply tube with inline filter
- (1) Mounting hardware
- (1) 1.0 GPM Laminar Flow Control
- (1) 12V DC plug-in power adaptor (H-2710-LR only)
- (4) AA Alkaline batteries (HE-2710-LR Only)

Dimensions:

- Base Width (Outside Measurement) 2-1/16"
- Faucet Height (Aerator to Base) 3-1/2"
- Faucet Height Overall 7-1/8"
- Depth (Center of Aerator to Center of Faucet Base) 5-1/8"
- Mounting Bolt Length. 1-7/8"
- Mounting Type Single-hole mount

Optional Variations and Accessories

- 0.5 GPM Laminar Flow Control
- 4" or 8" Centerset Cover Plate
- HC-010 Multi-Unit Voltage Adapter (AC Powered Only)
- HC-001-LR Mixing Valve with check, 3/8", Lead Free
- HBL-03-LR Thermostatic Mixing Valve with Checks (Lead Free)

The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com