

PRODUCT CATALOG 2025



Hydrotek
Sensor Faucets and Flush Valves



ABOUT US

Since its inception in 1985, Hydrotek has devoted its resources to develop and manufacture sensor-operated, automatic faucets and flush valves. All of Hydrotek's faucet and flush valve models are available in either AC powered or battery operated versions.

Hydrotek's products incorporate their own uniquely designed and patented electronics, mixing mechanisms, chemical-resistant rubber seals and slow closing solenoid valves. These innovative features have enabled Hydrotek to become an industry leader today.

Hydrotek products have received approvals from many countries including: ANSI/ASME and ASSE (USA), CSA (Canada), SIRIM (Malaysia), DGWV (Germany), NKB (Sweden) and CE MARK (Europe).

Hydrotek currently distributes its sensor products throughout the United States, Canada, Mexico and other numerous markets around the world, mostly through its appointed representatives or wholesale distributors where service can be provided.

Because of Hydrotek's strong desire and commitment to provide customers with the highest quality products, we are constantly upgrading and improving the performance and reliability of our products.

Hydrotek is ISO 9001 certified to ensure that our customer satisfaction is at the highest level and that Hydrotek will continue to be a leader in the industry and serve the needs of our customers around the world.

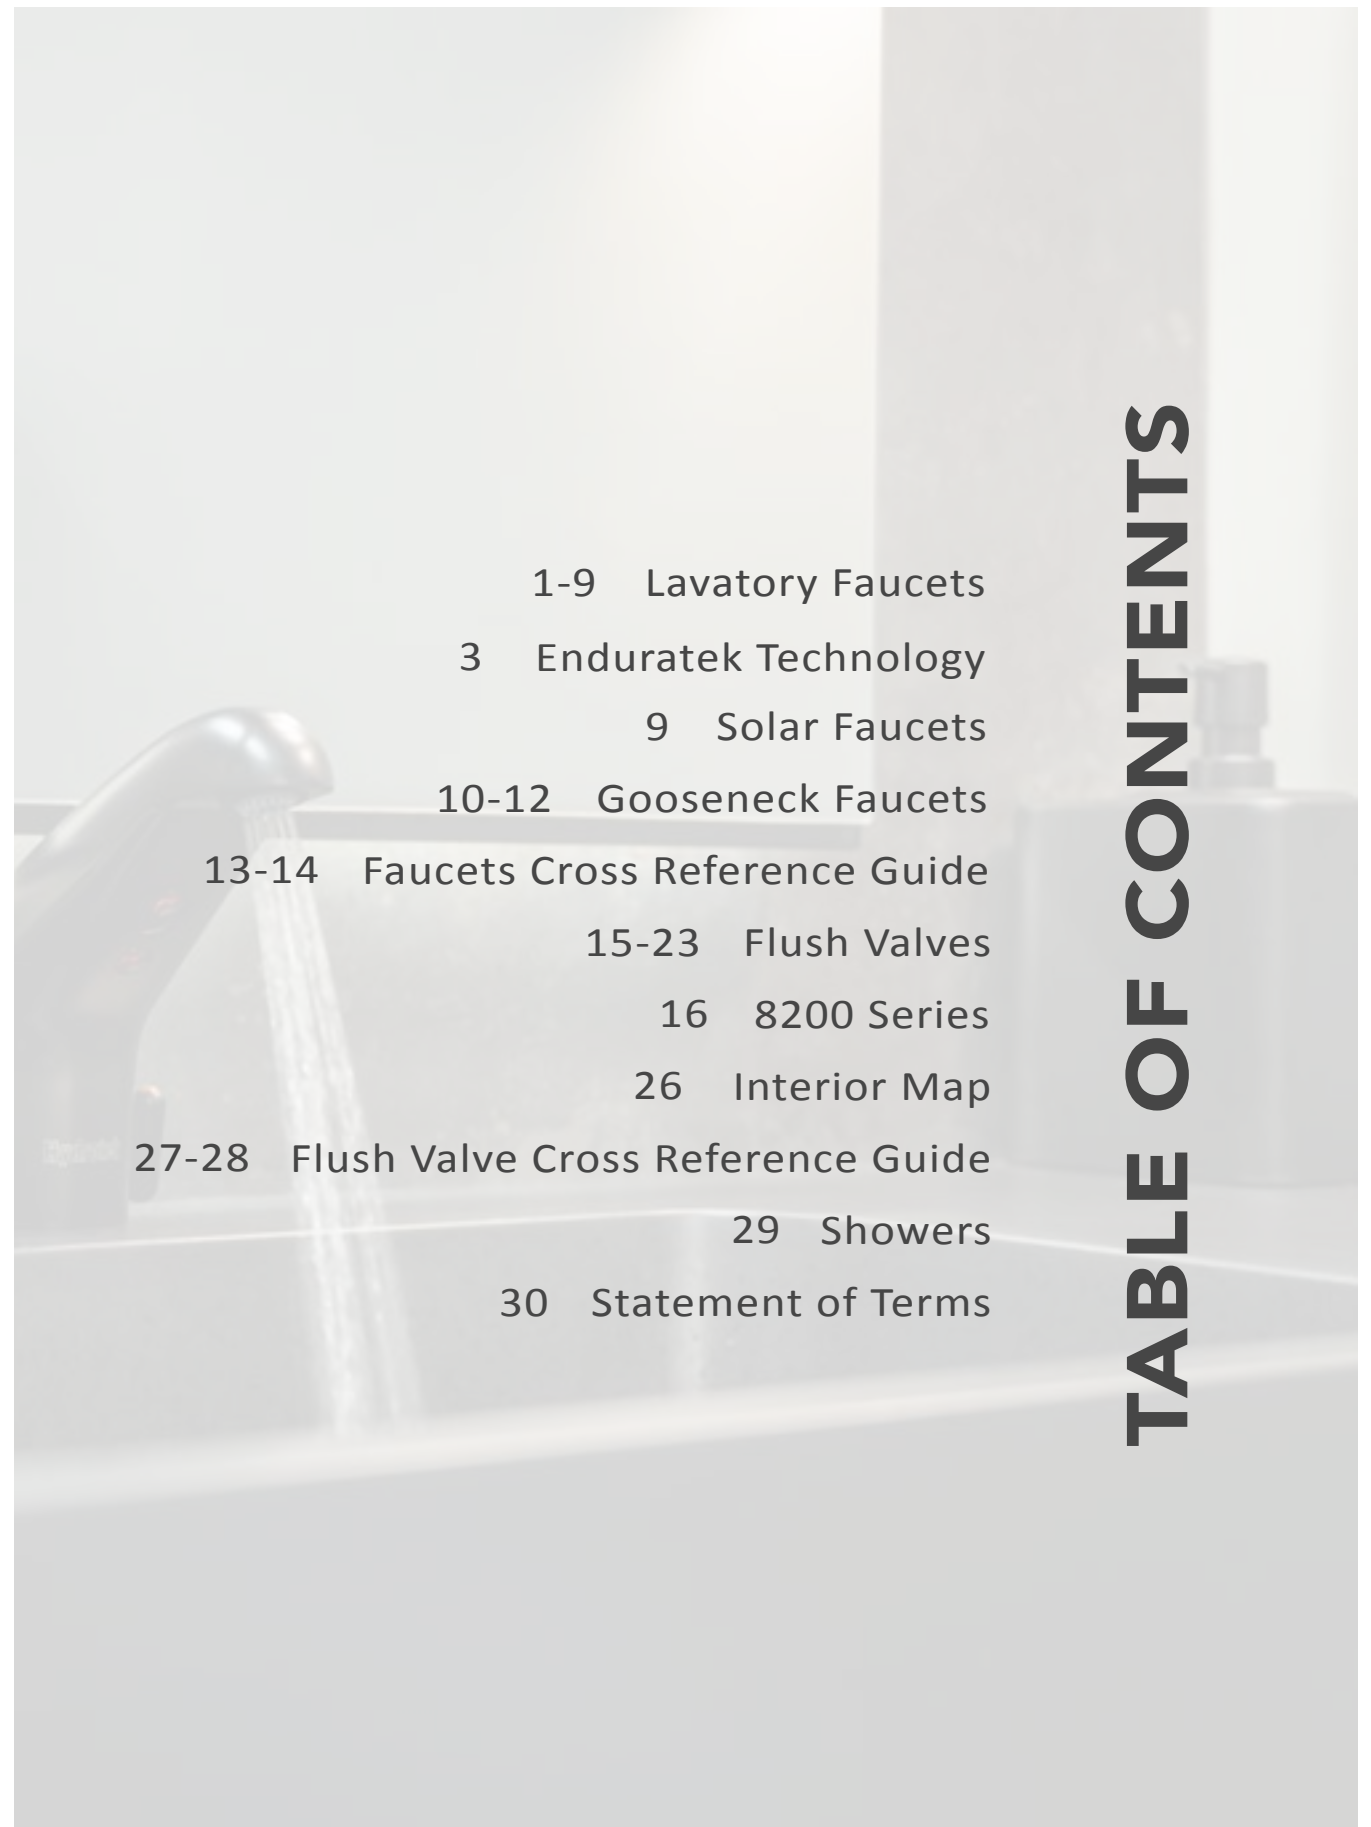


TABLE OF CONTENTS

1-9	Lavatory Faucets
3	Enduratek Technology
9	Solar Faucets
10-12	Gooseneck Faucets
13-14	Faucets Cross Reference Guide
15-23	Flush Valves
16	8200 Series
26	Interior Map
27-28	Flush Valve Cross Reference Guide
29	Showers
30	Statement of Terms



Lavatory Faucets

Hydrotek Sensor Faucets were designed and built to provide the very best in reliability, durability, and convenience, while ensuring a hygienic and water conserving solution for today's commercial market.

Utilizing a slow closing, piston operated solenoid valve technology, Hydrotek Sensor Faucets are among the most reliable, vandal resistant, and smooth functioning sensor faucets available.

The patented electronics present in all Hydrotek Sensor Faucets are the most advanced in the industry, allowing for configuration of the sensor range and angle, and featuring an adjustable time-out, shut-off delay, as well as a unique self-diagnostic capability.

1000C/2603C Series

The **1000C** and **2603C** Series faucets are piston operated sensor faucets that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings.

- Solid Brass Construction
- Optional Below Deck Mixing (HC-001 or HBL-03)
- Below Deck Components
- AC Plug-in Adapter Included for AC Powered Models

1000C Series

- Cast 4" Center-Set , 3 Point Anchoring System
- Twist Free and Tamper Resistant
- Comes in 4 finishes: Chrome, Polished Brass, Brushed Nickel, and Matte Black

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-1000C-LR	AC Powered, Lead Free	7.9	6	475.26
H-1000CPB-LR	AC Powered, Polished Brass, Lead Free	7.9	6	517.00
H-1000CBN-LR	AC Powered, Brushed Nickel, Lead Free	7.9	6	517.00
H-1000CMB-LR	AC Powered, Matte Black, Lead Free	7.9	6	517.00
HB-1000C-LR	Battery Powered, Lead Free	6.8	6	457.26
HB-1000CPB-LR	Battery Powered, Polished Brass, Lead Free	6.8	6	517.00
HB-1000CBN-LR	Battery Powered, Brushed Nickel, Lead Free	6.8	6	517.00
HB-1000CMB-LR	Battery Powered, Matte Black, Lead Free	7.9	6	517.00
H-1000C-LRDC	AC w/ DC Backup, Lead Free	7.9	6	482.90
H-1000CPB-LRDC	AC w/ DC Backup, Polished Brass, Lead Free	7.9	6	526.00
H-1000CBN-LRDC	AC w/ DC Backup, Brushed Nickel, Lead Free	7.9	6	526.00
H-1000CMB-LRDC	AC w/ DC Backup, Matte Black, Lead Free	7.9	6	526.00



2603C Series

- Single-Hole Deck Mount

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-2603C-LR	AC Powered, Lead Free	8.1	6	448.90
HB-2603C-LR	Battery Powered, Lead Free	5.9	6	430.90
H-2603C-LRDC	AC w/ DC Backup, Lead Free	8.1	6	456.90





Optimizing the Power Draw

Batteries have transformed the way we operate in the world, allowing us portability, mobility, and convenience.

Battery technology continues to progress, however, the typical batteries available have largely remained unchanged for decades.

Special energy storing cells are available, but they come at a hefty cost or are only in a form factor that excludes them from use in typical commercial and consumer products.

With battery technology progressing at a slow rate, the only other solution to increase the available use cycles in electronic products was to use more energy efficient components.

By meticulously optimizing the power draw of each of the electronic components in our products, we've been able to increase the number of on/off cycles of our products equipped with Enduratek from our already **efficient 400,000 cycles to 1.5 million cycles** running on a set of 4 AA batteries.

What does this mean for you? It means you'll forget your Hydrotek products even had batteries.

All new Hydrotek products will come with Enduratek as a standard option. For now, the following products are equipped with Enduratek:



2710 Series 2730 Series 2800 Series 2800EM Series 4100-LR Series 6300-LR Series



5000E Series 5000EM Series 7000E Series 7000EM Series 7800 Series

Enduratek products start with the HE- prefix

The New 2800 Series

The **2800 Series** faucet is a single-hole deck mounted, piston operated sensor faucet that provides a vandal resistant, Lead Free, no touch solution that promotes better hygiene and energy savings.

Designed to be easy to install and maintain, all major faucet components are encased above deck, making for easier access. The sensor included in this faucet is self adapting, meaning manual adjustments are not necessary.

- ADA Compliant. Meets all barrier free codes
- Conserves water and energy
- Easily installed in new or retrofit applications
- Competitively priced for today's commercial market
- Promotes cleanliness & hygiene
- Proven Hydrotek craftsmanship and reliability
- Above Deck Components

2800 Series

- Vandal resistant faucet body with chrome plated, solid metal construction
- Above deck faucet design allows for quick and simple installation and access to all major faucet component parts.
- "Self-adapting" sensor distance adjustment eliminates the need for manual sensor adjustments.
- 30 second time-out feature prevents accidental sink overflow.
- Standard 0.5 GPM flow control for water conservation and annual savings.
- Single-hole deck mount with optional 4" and 8" cover plate for vandal resistant three point anchoring.
- Optional Below Deck Mixing (HC-001 or HBL-03)
- AC Plug-in Adapter included for AC Powered Models

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-2800-LR	AC Powered, Lead Free	4.3	6	503.68
H-2800-MB-LR	AC Powered, Matte Black, Lead Free	4.3	6	538.00
H-2800-BN-LR	AC Powered, Brushed Nickel, Lead Free	4.3	6	538.00
HE-2800-LR	Lead Free, Battery Powered with Enduratek®	4.5	6	473.14
HE-2800BN-LR	Matte Black, Lead Free, Battery Powered with Enduratek®	4.5	6	508.00
HE-2800MB-LR	Brushed Nickel, Lead Free, Battery Powered with Enduratek®	4.5	6	508.00



2800EM Series

- Hot/Cold Mixing
- Manual On/Off Option
- Mixing with Temperature Adjust
- Optional below deck mixing (HBL-04)
- AC Plug-in Adapter included for AC Powered Models

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-2800EM-LR	AC Powered, Lead Free, Mixing Manual on/off	5.8	6	539.98
H-2800EM-MB-LR	AC Powered, Matte Black, Lead Free, Mixing Manual on/off	5.8	6	576.00
H-2800EM-BN-LR	AC Powered, Brushed Nickel, Lead Free, Mixing Manual on/off	5.8	6	576.00
HE-2800EM-LR	Battery Powered with Enduratek®, Lead Free, Mixing Manual on/off	5.9	6	508.21
HE-2800EM-MB-LR	Battery Matte Black, with Enduratek®, Lead Free, Mixing Manual on/off	5.9	6	548.00
HE-2800EM-BN-LR	Battery Brushed Nickel, with Enduratek®, Lead Free, Mixing Manual on/off	5.9	6	548.00



2710/2730 Series

Our **2710** and **2730** Series joins the robust reliability of our C-Series faucets with modern, minimalist design to provide elegant sensor faucets that are vandal resistant, more hygienic, and more energy efficient with our proprietary Enduratek technology.

- Solid Brass Construction
- Optional Below Deck Mixing (HC-001 or HBL-03)
- Below Deck Components
- Up to 1.5 million cycles on a set of AA batteries with our proprietary Enduratek technology



2710 Series

- Single-Hole Deck Mount
- AC Plug-in Adapter included for AC Powered Models

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-2710-LR	AC Powered, Lead Free	4.8	6	453.82
H-2710-BG-LR	AC Powered, Brushed Gold, Lead Free	4.8	6	517.00
H-2710-MB-LR	AC Powered, Matte Black, Lead Free	4.8	6	517.00
HE-2710-LR	Battery Powered with Enduratek, Lead Free	4.4	6	436.29
HE-2710-BG-LR	Battery Powered with Enduratek, Brushed Gold, Lead Free	4.4	6	508.00
HE-2710-MB-LR	Battery Powered with Enduratek, Matte Black, Lead Free	4.4	6	508.00
H-2710-LRDC	AC w/DC Backup, Lead Free	5.2	6	463.98
H-2710-BG-LRDC	AC w/DC Backup, Brushed Gold, Lead Free	5.2	6	526.00
H-2710-MB-LRDC	AC w/DC Backup, Matte Black, Lead Free	5.2	6	526.00



2730C Series

- Single-Hole Wall Mount
- AC Plug-in Adapter included for AC Powered Models

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-2730-LR	AC Powered, Lead Free	4.1	6	462.98
HE-2730-LR	Battery Powered with Enduratek, Lead Free	3.8	6	453.82
H-2730-LRDC	AC w/DC Backup, Lead Free	4.5	6	472.68

5000E/5000EM Series

The **5000E** and **5000EM** Series faucets are elegant sensor faucets that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings.

- All Metal Construction
- Single Hole Deck Mount
- Above Deck Components
- AC Plug-in Adapter Included for AC Powered Models

Designed for easy installation and maintenance, all major faucet components are encased above deck, making for easier access. The sensor included in this faucet is self adapting, meaning manual adjustments are not necessary and the innovative sensor placement eliminates ambient reflectivity issues.



5000E Series

- Optional Below Deck Mixing (HC-001 or HBL-03)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-5000E-LR	AC Powered, Lead Free	7.0	6	427.68
HE-5000E-LR	Battery Powered with Enduratek, Lead Free	6.1	6	427.52
HE-5000EMB	Battery Powered with Enduratek, Matte Black, Lead Free	6.1	6	508.00

5000EM Series

- Hot/Cold Mixing
- Manual On/Off Option
- Mixing with Temperature Adjust
- Optional Below Deck Mixing (HBL-04)



Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-5000EM-LR	AC Powered, Lead Free	7.0	6	475.68
HE-5000EM-LR	Battery Powered with Enduratek, Lead Free	6.1	6	476.64
HE-5000EMMB-LR	Battery Powered with Enduratek, Matte Black, Lead Free	6.1	6	526.00

7800 SERIES

ASSE 1070 Thermostatic Faucet



Built-in Safety

Integrating an ASSE 1070 certified thermostatic mixing valve, the new 7800 series faucet internally regulates water temperature within a safe range for general use eliminating the need for an external thermostatic mixing valve.

Designed to be easy to install and maintain, all major faucet components are encased **above deck**, making for easier access.

7800EM Series

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HE-7800EM-LR	Battery Lavatory with Enduratek®, Above Deck, Thermostatic Mixing	7.1	6	623.68

7000E/7000EM/7800EM/3000C Series

The **7000E, 7000EM, 7800EM and 3000C** Series faucets are sensor faucets that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings.

- Solid Brass Construction
- Single Hole Deck Mount
- Above Deck Components
- AC Plug-in Adapter Included for AC Powered Models

7000E Series

- Optional Below Deck Mixing (HC-001 or HBL-03)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-7000E-LR	AC Powered, Lead Free	7.8	6	331.68
HE-7000E-LR	Battery Powered with Enduratek, Lead Free	7.8	6	401.20



7000EM Series

- Hot/cold mixing
- Mixing with Temperature Adjust
- Optional Below Deck Mixing (HBL-04)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-7000EM-LR	AC Powered, Lead Free	7.8	6	348.68
HE-7000EM-LR	Battery Powered with Enduratek, Lead Free	7.8	6	453.82



3000C Series

- Piston Operated
- Hot/cold mixing
- Manual On/Off Option
- Mixing with Temperature Adjust
- Above and below Deck Components
- Optional Below Deck Mixing (HBL-04)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-3000C-LR	AC Powered, Lead Free	12.1	4	583.98
HB-3000C-LR	Battery Powered, Lead Free	11	4	568.68
H-3000C-LRDC	AC w/DC Backup, Lead Free	12.1	4	595.98



Solar Faucets

Hydrotek now offers a solar powered faucet to augment the excellent water savings our sensor faucet technology offers with added power savings.

The energy efficient solar sensor faucet harnesses an ambient light source (natural or artificial) to power the faucet. This provides up to 6 years of maintenance free use.

Built on the same design principles as the 5000 series sensor faucets, the 7000SLE contains all above deck components to simplify installation and maintenance.



Gooseneck Faucets

Hydrotek's gooseneck faucets provide the same reliability, durability, and convenience as the lavatory models but with a design that is ideal for clinic, hospital, or facility scrub stations.

The no touch sensor technology promotes better hygiene and each gooseneck can be fitted with different aerators for various water conserving flow rates. Hydrotek also offers different sized gooseneck and swing spouts that are interchangeable for a wider array of applications.



The **7000SLE** and **7000SLEM** Series faucets are solar sensor faucets that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings. These faucets use ambient light to function and utilizes a battery back-up.

- Solid Brass Construction
- Solar Powered
- Single Hole Deck Mount
- Above Deck Components

7000SLE Series

- Optional Below Deck Mixing (HC-001 or HBL-03)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-7000SLE-LR	Solar Powered, Non-Mixing, Lead Free	7.8	6	490.98



7000SLEM Series

- Hot/cold Mixing
- Mixing with Temperature Adjust
- Optional Below Deck Mixing (HBL-04)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-7000SLEM-LR	Solar Powered, Mixing, Lead Free	7.8	6	526.07



4000C Series

The **4000C** Series faucet is a single-hole deck mount, piston operated sensor faucet that provides a vandal resistant, no touch solution with hot/cold mixing and manual on/off adjustments that promotes better hygiene and energy savings. The 4000C Series faucet is a patented design that is ideal in clinics, hospitals, and manufacturing facilities for scrub stations.

- Solid Brass Construction
- Deck Mount Gooseneck
- Mixing with Temperature Adjust
- Optional Below Deck Mixing (HBL-04)
- Above and Below Deck Components
- AC Plug-in Adapter Included for AC Powered Models
- Manual On/Off Option

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-4000C-LR	AC Powered, Lead Free	10.5	4	621.68
HB-4000C-LR	Battery Powered, Lead Free	8.8	4	603.68
H-4000C-SD-LR	AC Powered, Lead Free Scrub Sink	10.5	4	641.68
HB-4000C-SD-LR	Battery Powered, Lead Free Scrub Sink	8.8	4	623.68
H-4000C-LRDC	AC w/ DC Backup, Lead Free	10.5	4	631.68
H-4000C-SD-LRDC	AC w/ DC Backup, Lead Free Scrub Sink	10.5	4	653.68



6300-LR/4100-LR Series

The **6300-LR** and **4100-LR** Series faucet are single-hole deck mounted faucets with an elegantly simple look and feel that fits in just about anywhere.

Its solid brass construction means it can withstand just about any environment and its above deck component design makes installation and maintenance very straightforward.

- Solid Brass Construction
- Deck Mount Gooseneck
- Above Deck Components

6300-LR Series

- Up to 1.5 million cycles on a set of AA batteries with our proprietary Enduratek technology
- Optional Below Deck Mixing (HC-001 or HBL-03)
- AC Plug-in Adapter included for AC Powered Models

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-6300-LR	AC Powered, Lead Free	4.6	6	465.68
HE-6300-LR	Battery Powered with Enduratek, Lead Free	5.2	6	436.28



4100-LR Series

- Integrated ceramic mixing with manual on/off
- AC Plug-in Adapter Included for AC Powered Models
- Optional Below Deck Mixing (HBL-04)

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-4100-LR	AC Powered, Lead Free	6.2	6	488.68
HE-4100-LR	Battery Powered with Enduratek, Lead Free	6.0	6	491.37



6000C/6700C Series

The **6000C** and **6700C** Series faucets are piston operated gooseneck sensor faucets that provide a vandal resistant, no touch solution that promotes better hygiene and energy savings. These faucets are ideal in clinics, hospitals, kitchens, and facilities for scrub stations.

- Solid Brass Construction
- Optional Below Deck Mixing (HC-001 or HBL-03)
- Below Deck Components
- AC Plug-in Adapter Included for AC Powered Models

6000C Series

- Deck Mount Gooseneck

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-6000C-LR	AC Powered, Lead Free	6.1	6	492.68
HB-6000C-LR	Battery Powered, Lead Free	5.5	6	474.85
H-6000C-LRDC	AC w/ DC Backup, Lead Free	7.9	6	502.68



6700C Series

- Wall Mount Gooseneck

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-6700C-LR	AC Powered, Lead Free	7.9	6	503.68
HB-6700C-LR	Battery Powered, Lead Free	6.8	6	485.64
H-6700C-LRDC	AC w/ DC Backup, Lead Free	7.9	6	515.37



Faucet Cross-Reference Guide

Please refer to the charts below to cross reference our models with the models of our competitors. This will give you a basis for ordering the right model to replace an existing installation of another product.

Hydrotek Model	Sloan Model	Zurn Model	Moen Model
H-1000C-LR	ETF-600	Z6915-XL-ACA	8301AC
HB-1000C-LR (Battery)	EBF-650	Z6915-XL	CA8301
H-2603C-LR	ETF-610	Z6913-XL-ACA	CA8302AC
HB-2603C-LR (Battery)	EBF-615	Z6913-XL	CA8302
H-2710-LR	SF-2100	Z6950-XL-S-ACA	
HE-2710-LR (Battery)	SF-2150	Z6950-XL-S	
H-2730-LR	ETF-820/SF-2800	Z6957-XL-ACA	
HE-2730-LR (Battery)	EBF-825/EBF-815/SF-2850	Z6957-XL	
HE-2800-LR (Battery)	EBF-415	Z6956-XL	8551
H-5000E-LR	SF-2400	Z6913-XL-ACA	8553AC
HE-5000E-LR (Battery)	SF-2450	Z6913-XL	8553
H-5000EM-LR	EAF-100	Z6950-XL-IM-S-ACA	8554AC
HE-5000EM-LR (Battery)	EAF-150	Z6950-XL-IM-S-ACA	8554
H-6000C-LR	ETF-700	Z6920-XL-ACA	CA8303
HB-6000C-LR (Battery)	EBF-750	Z6920-XL	CA8303
H-6300-LR	EAF-700/SF-2200		CA8303AC
HE-6300-LR (Battery)	EAF-750/SF-2250	Z6920-XL	CA8303
H-6700C-LR	ETF-500	Z6922-XL-ACA	
HB-6700C-LR (Battery)	EBF-550	Z6922-XL	
H-7000E-LR	EAF-200		8559AC
HE-7000E-LR (Battery)	EAF-250		8559
H-7000EM-LR	EAF-225/EAF-200-ISM		
HE-7000EM-LR (Battery)	EAF-250-ISM		
HB-7000SLE-LR (Battery)	EAF-275		
HB-7000SLEM-LR	EAF-275-ISM		

Aerators / Flow Control

Part No.	Description	List Price Ea.
HB-003MVR-0.35	Laminar Spray-0.35GPM-Male-Vandal Resistant	7.95
HB-003AMVR	Laminar Spray-0.5GPM-Male-Vandal Resistant	7.95
HB-003AFVR	Laminar Spray-0.5GPM-Female-Vandal Resistant	7.95
HB-003BMVR	Laminar Flow Control-1.0 GPM-Male -Vandal Resistant	7.95
HB-003CMVR	Laminar Flow Control-2.2 GPM-Male-Vandal Resistant	8.15
HB-003DFVR	Laminar Flow Control-2.2GPM-Female-Vandal Resistant	8.15
HB-003EF	Laminar Flow Control-1.5GPM-Female	6.95
HB-003GF	Laminar Flow Control-2.2GPM-Female	6.95
HB-003M	1.5GPM Soft Flow Aerator-Male	5.95
HB-003MVR-1.5	1.5GPM Soft Flow Aerator-Male-Vandal Resistant	7.95
HB-004F	Laminar Rose Spray 1.5-2.0 GPM Flow Control-Female	21.98
HB-003BF	Laminar Flow Control - 1.0 GPM - Female	6.95
HB-003IS 0.5-2.2GPM	Laminar Flow control Inserts, choose the flow rate from 0.5 to 2.2 GPM	2.68
HB-003ISB	Laminar Flow Control Spout Base Insert 1.0-1.5 GPM	6.82
HB-003SLIM0.35-1.5gpm	PCA SLIM ROSE SPRAY MALE 0.35-1.5GPM NO METAL SHELL	6.28
HB-003MJVR-1.0GPM	Laminar Flow Control - 1.0 GPM - Male, Junior Size, 2710 & 2730	5.95
HB-003MJVR-0.5GPM	Laminar Flow Control - 0.5 GPM - Male, Junior Size, 2710 & 2730	5.95
HCE-006	Aerator Connector for 5000E & EM	8.33
HEX KEY	Green Plastic Aerator Key - VR (2710, 2730)	1.66
RED KEY	Red Plastic Aerator Key	1.66
METAL KEY	VR Aerator Key	1.66

Faucet Accessories and Parts

Part No.	Description	List Price Ea.
HB7-001	Solar Cell Assembly	51.64
HB7-004	Solar PCB/Sensor	163.70
HB7-006	Solar Solenoid Coil	75.88
HC-006E	4" Cover Plate with Mounting Kit (H/HB-2603C, 6000C, 6700C)	29.74
HC-006F	8" Cover Plate with Mounting Kit (H/HB-2603C, 6000C, 6700C)	41.67
HC-006G	8" Cover Plate with Mounting Kit (H/HB-1000C)	41.67
HC-006H	4" Cover Plate with Mounting Kit (H/HB-3000C, 4000C, 4000C-SD)	29.74
HC-006J	8" Cover Plate with Mounting Kit (H/HB-3000C, 4000C, 4000C-SD)	41.67
HC-006K	4" Cover Plate with Mounting Kit (H/HE-5000E, 5000EM, 4100-LR , 7000E, 7000EM)	29.74
HC-006L	8" Cover Plate with Mounting Kit (H/HE-5000E, 5000EM, 4100-LR , 7000E, 7000EM)	41.67
HC-010	Multi-Unit Power Adapter (Powers up to 8 units) C-Series Faucets	89.25
HC-010E	Multi-Unit Power Adapter (Powers up to 8 units) E-Series Faucets	89.25
HCC-008B	12V DC Plug-In Adapter (C-Series Faucets)	43.30
HCE-008	7.5V DC Plug-In Adapter (E-Series Faucets)	43.30
HC-027A	Temperature Adjuster Rod Assembly	79.13
HC-029	Wrist Blade Handle	45.61
H41-002	Ceramic Cartridge, Cover, Handle Assembly (4100 Series)	68.98
HCB-017A	Solenoid Valve Repair Kit (1000C, 2603C, 6000C, 6700C)	31.98
HCB-017B	Solenoid Valve Repair Kit (3000C, 4000C)	32.98
HCB-019	Coil Module (3000C, 4000C)	120.27
HCC-005	Solenoid Valve (1000C, 2603C, 6000C, 6700C)	171.01
HCC-019	Coil Module (for HCC-005 Solenoid Valve)	120.27
HCE-004	Solenoid Module, without Solenoid Coil (E-Series Faucets)	75.88
HCE-019	Solenoid Coil, without Solenoid Module (E-Series Faucets)	75.88
HCE-194	Solenoid Module and Solenoid Coil (E-Series Faucets)	132.67
HCC-011A	Control Module (H-1C, 2603C, 3C, 4C, 6C, 67C) *Specify model*	167.71
HCC-011B	Control Module (HB-1C, 2603C, 3C, 4C, 6C, 67C) *Specify model*	167.71
HCE-018A	Control Module (H-5000E, 5000EM)	187.40
HCE-018B	Control Module (HE-5000E, 5000EM)	187.40
HBL-04-LR	Thermostatic, Anti-Scald Mixing Valve - 3/8" In/Out with Checks, Lead Free (4 Port)	113.00
HBL-03-LR	Thermostatic, Anti-Scald Mixing Valve - 3/8" with Checks, Lead Free (3 Port)	95.93
HC-001-LR	Mechanical Mixing/Check Valve - 3/8" Compression, Lead Free	51.67
HC-002	Check Valve with Back Flow Protector	22.78
HC-003	Mixing T with Checks	19.97
HC-007A	6" Gooseneck Spout with Laminar Flow	41.78
HC-007G	8" Gooseneck Spout with Laminar Flow	52.68
HC-007E	6" 45-degree Swing Gooseneck Spout with Laminar Flow Control	32.53
HC-007F	8" 45-degree Swing Gooseneck Spout with Laminar Flow Control	39.79
HCC-003 A/B	Control Box Assembly (1000C, 2603C, 6000C, 6700C) *Specify for AC or Battery	281.50

Flush Valves

Hydrotek's AUTOFLUSH Valves are the most advanced electronic flushing system in the industry today. By incorporating our patented field tested electronic circuitry and a slow-closing solenoid valve, Hydrotek has developed an innovative non-diaphragm, piston flushing mechanism with a true mechanical override that will provide years of dependable and trouble free service.

The Hydrotek AUTOFLUSH system is completely automatic; there is no contact with any surface, no handle to push and it flushes only when it is used. It provides the ultimate in sanitary protection, the convenience of cleaner restroom facilities and the most efficient system in water conservation.



The 8200 Series Complete and Retrofit

Aesthetically pleasing, but not overbearing. A look to compliment any commercial restroom, whether it be a standard public restroom or a high-end, luxurious one.

The **8200** Series isn't just an aesthetic upgrade, we've made some other thoughtful improvements under the hood:



Forward Removable Top Cap




The 8200 Series top cap simply removes forward eliminating the need for special concessions where ADA handicap bars are required, like hospital facilities.

Enduratek Technology

1,500,000+
Cycles

Our optimized energy management technology finally comes to a flush valve line allowing up to 1.5 MILLION cycles from a set of 4 AA batteries. That's nearly 4 times the longevity of our already energy-efficient offerings.

Simplified Flow Rate Adjustment



We have made flow rate adjustment unique to Hydrotek flush valves even simpler in the 8200 Series with a dial selector that selects between preset flow rates.

True Mechanical Override



A feature that has proven again and again to be indispensable in the cases where the electronics fail. It is a feature you cannot afford to not have.

Water Resistant Components



For areas that utilize a spray down of the entire restroom for cleaning and sanitation, the sealed sensor assembly and water-resistant battery holder and connectors provide superior protection from water damage.

Foolproof Maintenance



Maintenance made so simple literally anyone can do it. Individual parts now come together into assemblies that require nothing but a simple replacement that only requires a screwdriver to accomplish.

Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HE8200-1.6	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	9.3	4	489.85
● HE8200-1.28	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	9.3	4	489.85
HE8200-1.28DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	9.3	4	507.23
HE8200-1.0	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	8.95	4	489.85
● HE8200-0.5	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	8.95	4	489.85
● HE8200-0.125	0.125 GPF Urinal, 3/4" Stop and 3/4" Top Spud	8.95	4	489.85
RETROFIT UNITS				
HE8200RF-1.6	1.6 GPF Closet (Retrofit Sloan, Toto, and Zurn)	6.35	4	363.39
● HE8200RF-1.28	1.28 GPF Closet (Retrofit Sloan, Toto, and Zurn)	6.35	4	363.39
HE8200RF-1.28DF	1.28/1.0 "Dual Flush" GPF Closet (Retrofit Sloan, Toto, and Zurn)	6.35	4	384.74
HE8200RF-1.0	1.0 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	6.35	4	363.39
● HE8200RF-0.5	0.5 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	6.35	4	363.39
● HE8200RF-0.125	0.125 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	6.35	4	363.39

● This label beside the part number denotes a WaterSense Labeled Product



HB-8000SLE Series

The Hydrotek **HB-8000SLE** Solar Flush Valve is built upon the same reliable and versatile electronic flushing system as the 8000C series sensor flush valves, but powered by a solar cell that will generate more energy savings on top of the excellent water savings the 8000 series flush valves provide. Rated for 650,000 flush cycles, this valve can last up to 10 years before needing the battery back-up replaced.

- Solar Powered
- Complete and Retrofit Units
- True Mechanical Override
- Solid Brass Construction



HB8RFKC Series

The Hydrotek **HB8RFKC** is a battery operated, retrofit sensor flush valve that is the most dependable and versatile electronic flushing system in the industry today. Installation is quick and easy as it utilizes your existing Sloan, Delany, Zurn, or Toto stop valve, vacuum breaker and flush tube.

- Battery Powered
- Retrofit Units
- True Mechanical Override
- Solid Brass Construction



Solar Powered

COMPLETE UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000SLE-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	490.10
HB-8000SLE-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	490.10
HB-8000SLE-B2	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.5	4	490.10
HB8SLE-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	507.25
● HB8SLE-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	507.25
● HB8SLE-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	490.10
HB8SLE-11	1.1 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	490.10
● HB8SLE-B1-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	490.10
● HB8SLE-B1-0125	0.125 (Pint) GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	490.10
HB8SLE-B2-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.5	4	490.10

RETROFIT UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB8RSLE-C	1.6 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8RSLE-U	1.0 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8RSLE-CD	1.6 GPF Closet (Retrofit Delany)	7.7	4	382.98
HB8RSLE-UD	1.0 GPF Urinal (Retrofit Delany)	7.7	4	382.98
HB8SLE-R16DF	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	400.23
HB8SLE-R128DF	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	400.23
HB8SLE-R128	1.28 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8SLE-R11	1.1 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8SLE-R05	0.5 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8SLE-R0125	0.125 (Pint) GPF (1/8 GPF) Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8SLE-R16DFD	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Delany)	7.7	4	400.23
HB8SLE-R128DFD	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Delany)	7.7	4	400.23
HB8SLE-R128D	1.28 GPF Closet (Retrofit Delany)	7.7	4	382.98
HB8SLE-R05D	0.5 GPF Urinal (Retrofit Delany)	7.7	4	382.98

Battery Powered

RETROFIT UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB8RFKC-C	1.6 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8RFKC-U	1.0 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8RFKC-CD	1.6 GPF Closet (Retrofit Delany)	7.7	4	354.61
HB8RFKC-UD	1.0 GPF Urinal (Retrofit Delany)	7.7	4	354.61
HB8-R16DF	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8-R128DF	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	382.98
HB8-R128	1.28 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8-R11	1.1 GPF Closet (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8-R05	0.5 GPF Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8-R0125	0.125 (Pint) GPF (1/8 GPF) Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8-R025	0.25 GPF (1/4 GPF) Urinal (Retrofit Sloan, Toto, and Zurn)	7.7	4	354.61
HB8-R16DFD	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Delany)	7.7	4	382.98
HB8-R128DFD	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Delany)	7.7	4	382.98
HB8-R128D	1.28 GPF Closet (Retrofit Delany)	7.7	4	354.61
HB8-R11D	1.1 GPF Closet (Retrofit Delany)	7.7	4	354.61
HB8-R05D	0.5 GPF Urinal (Retrofit Delany)	7.7	4	354.61



H-8000C Series

The Hydrotek **H-8000C** Sensor Flush Valve is the AC powered variant of the 8000C series flush valves. Dependable and versatile, the vandal resistant brass construction is available in many configurations and is field adjustable for left and right rough-in as well as convertible from/to urinal or closet allowing the most flexibility in the installation and maintenance in each unit.

- Optional Multi-unit Power Adapter (HC-010) can power up to 8 units.
- Complete Units
- AC Plug-in Adapter Included
- True Mechanical Override
- Solid Brass Construction



AC Powered

EXPOSED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-8000C-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	466.52
H-8000C-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	466.52
H-8000C-B2	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	12.7	4	466.52
H-8000C-ADC	(DC Backup) 1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	498.02
H-8000C-B1DC	(DC Backup) 1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	498.02
H-8000C-B2DC	(DC Backup) 1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	12.7	4	498.02
H8-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	474.21
● H8-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	474.21
● H8-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	466.52
H8-11	1.1 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	466.52
● H8-B1-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	466.52
● H8-B1-0125	0.125 (Pint) GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	466.52
H8-B1-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	466.52
H8-B1-0375	0.375 GPF (3/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	466.52
H8-B2-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	12.7	4	466.52
H8-16-DFDC	(DC Backup) 1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	508.00
● H8-128-DFDC	(DC Backup) 1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	508.00
● H8-128-DC	(DC Backup) 1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.7	4	498.02
● H8-B1-05DC	(DC Backup) 0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	498.02
● H8-B1-0125DC	(DC Backup) 0.125 GPF Urinal, 3/4" Stop and 3/4" Top Spud	12.7	4	498.02
H8-B2-05DC	(DC Backup) 0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	12.7	4	498.02

HB-8000C Series

The Hydrotek **HB-8000C** Sensor Flush Valve is the battery powered variant of the 8000C series flush valves. Dependable and versatile, the vandal resistant brass construction is available in many configurations and is field adjustable for left and right rough-in as well as convertible from/to urinal or closet allowing the most flexibility in the installation and maintenance in each unit.

- Complete Units
- True Mechanical Override
- Solid Brass Construction
- Comes in 4 finishes: Chrome, Polished Brass, Brushed Nickel, and Matte Black



BATTERY POWERED EXPOSED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000C-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	439.09
HB-8000CPB-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud, Polished Brass	10.5	4	518.68
HB-8000CBN-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud, Brushed Nickel	10.5	4	518.68
HB-8000C-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	439.09
HB-8000CPB-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud, Polished Brass	10.5	4	518.68
HB-8000CBN-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud, Brushed Nickel	10.5	4	518.68
HB-8000C-B2	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.5	4	439.09
HB8-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	454.68
HB8CPB-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud, Brushed Nickel	10.5	4	518.68
● HB8-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	454.68
HB8CPB-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud, Brushed Nickel	10.5	4	518.68
● HB8-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	439.09
HB8CPB-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud, Brushed Nickel	10.5	4	518.68
HB8-11	1.1 GPF Closet, 1" Stop and 1-1/2" Top Spud	10.5	4	439.09
● HB8-B1-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	439.09
HB8CPB-B1-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-B1-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud, Brushed Nickel	10.5	4	518.68
HB8-B1-0375	0.375 GPF (3/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	439.09
HB8-B1-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	439.09
HB8CPB-B1-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-B1-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud, Brushed Nickel	10.5	4	518.68
● HB8-B1-0125	0.125 (Pint) GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.5	4	439.09
HB8CPB-B1-0125	0.125 (Pint) GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud, Polished Brass	10.5	4	518.68
HB8CBN-B1-0125	0.125 (Pint) GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud, Brushed Nickel	10.5	4	518.68
HB8-B2-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.5	4	439.09
HB-8000CMB-A	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud, Matte Black	10.5	4	518.68
HB-8000CMB-B1	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud, Matte Black	10.5	4	518.68



8000C Series Concealed

The Hydrotek **8000C** Series Concealed is the concealed flush variant of the 8000C series flush valve denoted by the CB/CT/D1B/D2B/D1T suffix. Dependable and versatile, the vandal resistant brass construction is available in many configurations and is field adjustable for left and right rough-in as well as convertible from/to urinal or closet allowing the most flexibility in the installation and maintenance in each unit.



- Complete Units
- 7" x 7" Stainless Steel Plate with Override Button Included
- Solid Brass Construction

Battery Powered

TOP SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000C-CT	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.6	4	533.78
HB-8000C-D1T	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
HB-8000C-D2T	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
HB8CT-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.6	4	560.09
HB8CT-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	12.6	4	560.09
HB8CT-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	12.6	4	533.78
HB8D1T-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
HB8D1T-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
HB8D1T-0125	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
HB8D2T-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
HB8D2T-025	0.25 GPF (1/4 GPF) Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
HB8D2T-0125	0.125 GPF (1/8 GPF) Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78

BACK SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000C-CB	1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud	11.4	4	509.30
HB-8000C-D1B	1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud	10.5	4	509.30
HB-8000C-D2B	1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud	10.5	4	509.30
HB8CB-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	11.4	4	535.62
HB8CB-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	11.4	4	535.62
HB8CB-128	1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud	11.4	4	509.30
HB8D1B-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud	10.5	4	509.30
HB8D1B-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Back Spud	10.5	4	509.30
HB8D1B-0125	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Back Spud	10.5	4	509.30
HB8D2B-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Back Spud	10.5	4	509.30
HB8D2B-025	0.25 GPF (1/4 GPF) Urinal, 1" Stop and 1-1/4" Back Spud	10.5	4	509.30
HB8D2B-0125	0.125 GPF (1/8 GPF) Urinal, 1" Stop and 1-1/4" Back Spud	10.5	4	509.30

AC Powered

TOP SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-8000C-CT	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	533.78
H-8000C-D1T	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
H-8000C-D2T	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
H-8000C-CTDC	(DC Backup) 1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	549.56
H-8000C-D1TDC	(DC Backup) 1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	549.56
H-8000C-D2TDC	(DC Backup) 1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	549.56
H8CT-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	560.09
H8CT-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	560.09
H8CT-128	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	533.78
H8D1T-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
H8D1T-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
H8D1T-0125	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	533.78
H8D2T-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
H8D2T-025	0.25 GPF (1/4 GPF) Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
H8D2T-0125	0.125 GPF (1/8 GPF) Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	533.78
H8CT-16-DFDC	(DC Backup) 1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	575.88
H8CT-128-DFDC	(DC Backup) 1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	575.88
H8CT-128-DC	(DC Backup) 1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud	13.3	4	549.56
H8D1T-05DC	(DC Backup) 0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	549.56
H8D1T-0125DC	(DC Backup) 0.125 GPF Urinal, 3/4" Stop and 3/4" Top Spud	10.7	4	549.56
H8D2T-05DC	(DC Backup) 0.5 GPF Urinal, 1" Stop and 1-1/4" Top Spud	10.7	4	549.56

BACK SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-8000C-CB	1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	509.30
H-8000C-D1B	1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	509.30
H-8000C-D2B	1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	509.30
H-8000C-CBDC	(DC Backup) 1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	525.09
H-8000C-D1BDC	(DC Backup) 1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	525.09
H-8000C-D2BDC	(DC Backup) 1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	525.09
H8CB-16DF	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	535.62
H8CB-128DF	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	535.62
H8CB-128	1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	509.30
H8D1B-05	0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	509.30
H8D1B-025	0.25 GPF (1/4 GPF) Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	509.30
H8D1B-0125	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	509.30
H8D2B-05	0.5 GPF Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	509.30
H8D2B-025	0.25 GPF (1/4 GPF) Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	509.30
H8D2B-0125	0.125 GPF (1/8 GPF) Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	509.30
H8CB-16-DFDC	(DC Backup) 1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	551.40
H8CB-128-DFDC	(DC Backup) 1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	551.40
H8CB-128-DC	(DC Backup) 1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud	12.1	4	525.09
H8D1B-05DC	(DC Backup) 0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud	11.2	4	525.09
H8D2B-05DC	(DC Backup) 0.5 GPF Urinal, 1" Stop and 1-1/4" Back Spud	11.2	4	525.09

8000C Series Concealed Wall Box

The Hydrotek **8000C** Series Concealed Wall Box variant of the 8000C series flush valve is designed specifically for installation applications that require an access panel to the system. The wall box provides easy access to all of the flush valve components when periodic maintenance is required. Dependable and versatile, the vandal resistant brass construction is available in many configurations and is field adjustable for left and right rough-in as well as convertible from/to urinal or closet allowing the most flexibility in the installation and maintenance in each unit.

- Complete Units
- True Mechanical Override
- Solid Brass Construction



Battery Powered

TOP SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000C-CT-WB	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	20.1	4	781.81
HB-8000C-D1T-WB	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	18.7	4	781.81
HB-8000C-D2T-WB	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud with Wall Box	18.7	4	781.81
HB8CT-16DF-WB	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	20.1	4	808.12
HB8CT-128DF-WB	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	20.1	4	808.12
HB8CT-128-WB	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	20.1	4	781.81
HB8D1T-05-WB	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	18.7	4	781.81
HB8D1T-0125-WB	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	18.7	4	781.81

BACK SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB-8000C-CB-WB	1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	19.4	4	757.33
HB-8000C-D1B-WB	1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	18.5	4	757.33
HB-8000C-D2B-WB	1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud with Wall Box	18.5	4	757.33
HB8CB-16DF-WB	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	19.4	4	783.65
HB8CB-128DF-WB	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	19.4	4	783.65
HB8CB-128-WB	1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	19.4	4	757.33
HB8D1B-05-WB	0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	18.5	4	757.33
HB8D1B-0125-WB	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	18.5	4	757.33

AC Powered

TOP SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-8000C-CT-WB	1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	781.81
H-8000C-D1T-WB	1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	781.81
H-8000C-D2T-WB	1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud with Wall Box	19.4	4	781.81
H-8000C-CTDC-WB	(DC Backup) 1.6 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	797.60
H-8000C-D1TDC-WB	(DC Backup) 1.0 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	797.60
H-8000C-D2TDC-WB	(DC Backup) 1.0 GPF Urinal, 1" Stop and 1-1/4" Top Spud with Wall Box	19.4	4	797.60
H8CT-16DF-WB	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	808.12
H8CT-128DF-WB	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	808.12
H8CT-128-WB	1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	781.81
H8D1T-05-WB	0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	781.81
H8D1T-0125-WB	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	781.81
H8CT-16DFDC-WB	(DC Backup) 1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	823.91
H8CT-128DF-WBDC	(DC Backup) 1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	823.91
H8CT-128DC-WB	(DC Backup) 1.28 GPF Closet, 1" Stop and 1-1/2" Top Spud with Wall Box	21.3	4	797.60
H8D1T-05DC-WB	(DC Backup) 0.5 GPF Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	797.60
H8D1T-0125DC-WB	(DC Backup) 0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Top Spud with Wall Box	19.4	4	797.60

BACK SPUD CONCEALED UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-8000C-CB-WB	1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	757.33
H-8000C-D1B-WB	1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	757.33
H-8000C-D2B-WB	1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud with Wall Box	19.2	4	757.33
H-8000C-CBDC-WB	(DC Backup) 1.6 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	773.13
H-8000C-D1BDC-WB	(DC Backup) 1.0 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	773.13
H-8000C-D2BDC-WB	(DC Backup) 1.0 GPF Urinal, 1" Stop and 1-1/4" Back Spud with Wall Box	19.2	4	773.13
H8CB-16DF-WB	1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	783.65
H8CB-128DF-WB	1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	783.65
H8CB-128-WB	1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	757.33
H8D1B-05-WB	0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	757.33
H8D1B-0125-WB	0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	757.33
H8CB-16DFDC-WB	(DC Backup) 1.6/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	823.91
H8CB-128DF-WBDC	(DC Backup) 1.28/1.0 GPF "Dual Flush" Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	823.91
H8CB-128DC-WB	(DC Backup) 1.28 GPF Closet, 1" Stop and 1-1/2" Back Spud with Wall Box	20.1	4	797.60
H8D1B-05DC-WB	(DC Backup) 0.5 GPF Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	797.60
H8D1B-0125DC-WB	(DC Backup) 0.125 GPF (1/8 GPF) Urinal, 3/4" Stop and 3/4" Back Spud with Wall Box	19.2	4	797.60

8CRFKC Series Concealed Retrofit

The Hydrotek **8CRFKC** is the concealed version of our retrofit sensor flush valve that is the most dependable and versatile electronic flushing system in the industry today. Installation is quick and easy as it utilizes your existing Sloan, Delany, Zurn, or Toto stop valve, vacuum breaker and flush tube.



- Retrofit Units
- 5" x 5" Stainless Steel Plate with Override Button Included
- Solid Brass Construction

BATTERY POWERED RETROFIT UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
HB8CRFKC-C	1.6 GPF Closet (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-U	1.0 GPF Urinal (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-16DF	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Sloan and Zurn)	6.9	6	420.86
HB8CRFKC-128DF	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Sloan and Zurn)	6.9	6	420.86
HB8CRFKC-128	1.28 GPF Closet (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-11	1.1 GPF Closet (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-05	0.5 GPF Urinal (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-0125	0.125 (Pint) GPF (1/8 GPF) Urinal (Retrofit Sloan and Zurn)	6.9	6	404.70
HB8CRFKC-025	0.25 GPF (1/4 GPF) Urinal (Retrofit Sloan and Zurn)	6.9	6	404.70

AC POWERED RETROFIT UNITS				
Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H8CRFKC-C	1.6 GPF Closet (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-U	1.0 GPF Urinal (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-16DF	1.6/1.0 GPF "Dual Flush" Closet (Retrofit Sloan and Zurn)	7.6	6	420.86
H8CRFKC-128DF	1.28/1.0 GPF "Dual Flush" Closet (Retrofit Sloan and Zurn)	7.6	6	420.86
H8CRFKC-128	1.28 GPF Closet (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-11	1.1 GPF Closet (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-05	0.5 GPF Urinal (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-0125	0.125 (Pint) GPF (1/8 GPF) Urinal (Retrofit Sloan and Zurn)	7.6	6	404.70
H8CRFKC-025	0.25 GPF (1/4 GPF) Urinal (Retrofit Sloan and Zurn)	7.6	6	404.70

Hydrotek Interior Map

Learn more about our products at www.hydrotekintl.com

Vandal Resistant

- Highly durable solid brass body
- Shatter-proof polycarbonate lens is separate from the sensor cover and is easy and cheap to replace

Conservation


- Flow rates as low as 0.125 GPF for urinal, 1.1 GPF for closet
- Energy efficient electronics: 400,000 on/off cycles on a set of AA batteries

Money Saving

- Superior piston flushing technology prevents water hammer and greatly outlasts diaphragm valves.
- VSI silicone elastomer seals are unaffected by chlorine, chloramines, or ammonia
- Standard self-cleaning filtering system
- Electronics are self-diagnostic
- Uses standard AA batteries

Convenience

- Sensor eyes are fully adjustable. Adjust length and angle
- Standard true mechanical override button lets you flush even without power
- Field adjustable flow rate allows you to change the flow rate to meet your needs if required and it allows you to switch from/to urinal or closet
- Left or right rough-in. Just turn the cap components to match the installation

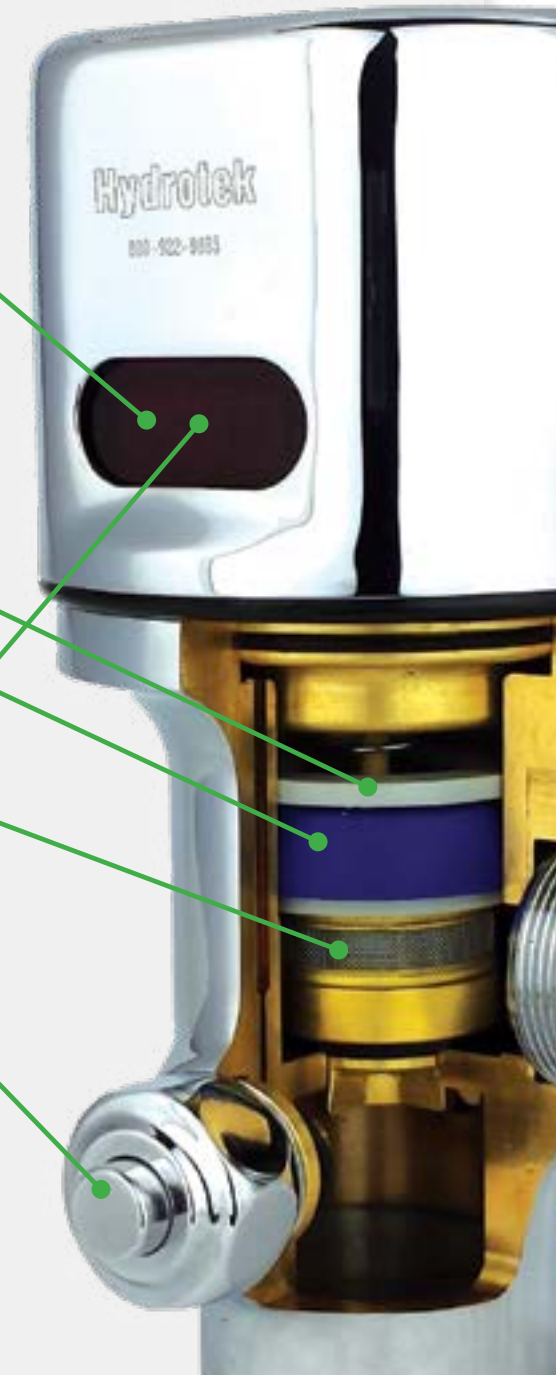

Flush Valve Cross-Reference Guide

Please refer to the following charts to cross reference our models with the models of our competitors. This will give you a basis for ordering the right model to replace an existing installation of another product.

CONEALED FLUSH VALVES		
Hydrotek Model	Sloan Model	Zurn Model
H-8000C-CB	140-1.6 ES-S, 152-1.6 ES-S	ZEMS6140AV, ZEMS6152AV
H-8000C-CB-WB	140-1.6 WB ES-S, 152-1.6 WB ES-S	
H-8000C-CT	153-1.6 ES-S	ZEMS6153AV
H-8000C-CT-WB	153-1.6 WB ES-S	
H-8000C-D1B	195-1.0 ES-S	ZEMS6195AV
H-8000C-D1B-WB	195-1.0 WB ES-S	
H-8000C-D1T	197-1.0 ES-S	ZEMS6197AV
H-8000C-D1T-WB	197-1.0 WB ES-S	
H-8000C-D2B	190-1.0 ES-S	ZEMS6190AV
H-8000C-D2B-WB	190-1.0 WB ES-S	
H-8000C-D2T	192-1.0 ES-S	ZEMS6192AV
H-8000C-D2T-WB	192-1.0 WB ES-S	

EXPOSED FLUSH VALVES			
Hydrotek Model	Sloan Model	Zurn Model	Moen Model
H-8000C-A	G2 111 HW-1.6	ZTR6200-WS1-HW	8310AC16
H-8000C-B1	ECOS 186-1.0 HW	ZTR6203-WS1-HW	8312AC10
H8-128	ECOS 111-1.28-LT	ZTR6200-EV-HW	8311AC
H8-16DF	ECOS 111-1.6/1.1-LT		8310ACDF16
H8-B1-05	ECOS 186-0.5 HW	ZTR6203-EWS-HW	8315AC05
H8-B1-0125	ECOS 186-0.125 HW	ZTR6203-ULF-HW	8316AC
HB-8000C-A	SLOAN 8111-1.6	ZER6000AV-WS1-CPM	8310
HB-8000C-B1	G2 8186-1.0	ZER6003PL-WS1-CCP	8312
HB8-128	SLOAN 8111-1.28		8311
HB8-16DF	ECOS 8111-1.6/1.1	ZTR6200-WS1-DF	8310DF16
HB8-B1-0125	G2 RESS-U-0.125	ZER6003PL-ULF-CCP	8316
HB8-B1-05	G2 8186-0.5	ZER6003AV-EWS-CPM	8315
HB8-R16DF	ECOS RESS-C BT DF-1.6/1.1		8310RDF16
HB8RFKC-C	SLOAN RESS-C-1.6		8310R16
HB8RFKC-U	SLOAN RESS-U-1.0	ZTR6203-WS1-X	8312SR10
HB8-125DF	ECOS 8111-1.28/1.1	ZTR6200-EV-DF	
HE8200-1.6	SLOAN G2 8111	ZTR6200-WS1-LL	8310
HE8200-1.28	SLOAN G2 8111-1.28	ZTR6200-EV-LL	8311
HE8200-1.28DF	ECOS 8111-1.28/1.1		
HB8-R128	SLOAN RESS-C-1.28		8310SR128
HB8-R128DF	ECOS RESS-C BT DF-1.28/1.1		
HE8200RF-1.6		ZTR6200-WS1-X	8310R16
HE8200RF-1.28		ZTR6200-EV-X	8310SR128
HE8200-1.0		ZTR6201-WS1-LL	8312
HE8200-0.5		ZTR6203-EWS	8315
HE8200-0.125		ZTR6203-ULF	8316
HB8-R05	SLOAN RESS-U-0.5	ZTR6203-EWS-X	8312SR05
HB8-R0125	SLOAN RESS-U-0.125	ZTR6203-ULF-X	8312SR125
HB-8000SLE-A	SOLIS 8111-1.6		
HB8SLE-128	SOLIS 8111-1.28		
HB8RSLE-C	SOLIS RESS-C BT-1.6		
HB8SLE-R128	SOLIS RESS-C BT-1.28		
HB-8000SLE-B1	SOLIS 8186-1.0		
HB8SLE-B1-05	SOLIS 8186-0.5		
HB8RSLE-U	SOLIS RESS-U SMT 1.0		
HB8SLE-R05	SOLIS RESS-U SMT-0.5		

Flush Valve Accessories and Parts

Part No.	Description	List Price Ea.
B8-10-01A	Housing (H/HB-8000C)	31.45
HC-010	Multi-Unit Power Adapter (Powers up to 8 units)	89.25
HC-010HW	Multi-Unit Power Adapter (Powers up to 8 units) - Hardwire	89.25
HC-083	Delany Adapter Nipple 2-1/4" L (HB8RFK, HB8RFKC)	21.22
HC-083-1.75	Delany Adapter Nipple 1-3/4" L (HB8RFK, HB8RFKC)	23.35
HC-083-2.75	Delany Adapter Nipple 2-3/4" L (HB8RFK, HB8RFKC)	23.35
HC-083-3.25	Delany Adapter Nipple 3-1/4" L (HB8RFK, HB8RFKC)	25.48
HC-083-3.75	Delany Adapter Nipple 3-3/4" L (HB8RFK, HB8RFKC)	27.59
HC-083-4.25	Delany Adapter Nipple 4-1/4" L (HB8RFK, HB8RFKC)	29.72
HC-083A	Nipple - 2-1/8" L (all Flush Valve Models except Delany)	16.76
HC-083B	Nipple - 2-1/2" L (all Flush Valve Models except Delany)	17.20
HC-083C	Nipple - Standard 2-7/8" L (all Flush Valve Models except Delany)	19.53
HC-083D	Nipple - 3-1/2" L (all Flush Valve Models except Delany)	21.35
HC-083E	Nipple - 4" L (all Flush Valve Models except Delany)	22.78
HC-083F	Nipple - 4-1/2" L (all Flush Valve Models except Delany)	24.28
HC-083G	Nipple - 5" L (all Flush Valve Models except Delany)	26.28
HC-083H	Nipple - 5-1/2" L (all Flush Valve Models except Delany)	29.55
HC-083J	Nipple - 6" L (all Flush Valve Models except Delany)	33.30
HC-084	Sweat Kit - 3/4"	12.71
HC-084B	Sweat Kit - 1"	14.50
HC-086	Vacuum Breaker Replacement Kit (w/ rubber & friction ring)	6.29
HC-086A	Flush Tube, Closet, 1-1/2" Top Spud x 8-1/2" L w/ Vac. Breaker	23.54
HC-086A-24	Flush Tube, Closet, 1-1/2" Top Spud x 24" L w/ Vac. Breaker	52.37
HC-086B	Flush Tube, Urinal, 3/4" Top Spud x 8-1/2" L w/ Vac. Breaker	23.54
HC-086B-24	Flush Tube, Urinal, 3/4" Top Spud x 24" L w/ Vac. Breaker	52.37
HC-086C	Flush Tube, Urinal, 1-1/4" Top Spud x 8-1/2" L w/ Vac. Breaker	23.54
HC-086D	Trap Primer Assembly with Vacuum Breaker (11-1/2" Rough In)	87.50
HC-086SRPS	Split Ring Pipe Support	33.33
HC-089	Manual Push Button Assembly	43.65
HC-093A	Top Spud Assembly 3/4"	17.51
HC-093B	Top Spud Assembly 1-1/4"	17.51
HC-093C	Top Spud Assembly 1-1/2"	17.51
HCC-008C	Plug-In Power Adapter without Output Plug (H-8000C)	38.58
HCC-080A	Control Module (H-8000C) **Specify Closet or Urinal	167.71
HCC-080B	Control Module (HB8RFKC, HB-8000C) **Specify Closet or Urinal	167.71
HCC-080E	Sensor Eye & Cable (HB8RFKC, H/HB-8000C)	71.67
HCC-098	Solenoid Coil Module (HB8RFKC, 8000C)	120.27
HCC-102	Control Disc (H/HB-8000C)	46.08
HCC-106	Repair Kit, Solenoid Valve (HB8RFKC, H/HB-8000C)	41.68
HCC-005-04A	Solenoid Piston Assembly	13.95

Showers

The Hydrotek 9000C Series Sensor Shower provides an innovative new approach in water conservation for public shower facilities such as those in schools, gyms, hospitals, nursing homes, factories, parks, and recreation areas. Using our patented sensor technology, the 9000C prevents continuous running when a person is not present, eliminating leaks due to human error.



9000C Series

The 9000C Series shower is a piston operated sensor shower that provides a vandal resistant, no touch shower solution that promotes better hygiene and energy savings.



Model No.	Description	Wt. Ea. Lbs.	Case Qty	List Price Ea.
H-9000C	AC Powered Automatic Shower	4.0	6	451.39
H-9000C-DC	(DC Backup) AC Powered Automatic Shower	4.0	6	465.39
HB-9000C	Battery Powered Automatic Shower	4.0	6	451.39

Shower Accessories and Parts

REPLACEMENT PARTS		
Part No.	Description	List Price Ea.
HCC-009C	7x7 Wall Plate Sensor Eye Cable (Shower)	118.68
HCB-017A	Solenoid Valve Repair Kit (for HCB-005 Solenoid Valve)	31.98
HCC-005	Complete Solenoid Valve	171.01

Statement of Terms

Limited Warranty

5 Year Limited Warranty (for products purchased on and after January 1, 2023)*

Hydrotek warrants its products to be free of defects in material and workmanship to the original purchaser, for a period of **five (5) years from the date of purchase**, when properly installed and under normal use and service. If a product is defective, it may be returned to Hydrotek or its designated distributors within five (5) years from the date of purchase by the original purchaser.

Hydrotek will, at its discretion, either repair or replace any part or parts which prove to be defective, free of charge. No claims will be allowed for labor, transportation, or other incidental costs. There are no warranties which extend beyond the description on the face hereof. In no event is Hydrotek responsible for any consequential damages of any kind whatsoever.

**Products purchased before January 1, 2023 are subject to our previous limited warranty of 3 years.*

Return Policy

Hydrotek products returned for reasons other than defects or shipping errors are subject to a minimum 20% restocking fee within one year of purchase, plus the cost for any reconditioning that may be required. A Returned Goods Authorization (RGA) number must be issued by Hydrotek for all returned products, and written on the shipping label as well as on all related return documents to ensure proper credit is issued. All returned products should be received in their original boxes and shipping carton or be otherwise suitably packed to avoid damage. All returns must be freight prepaid. Returns received without prior authorization may be refused and returned to the sender at the sender's expense. Credit allowance will be limited to the cost of the product only (excluding freight charges) and will be in the form of merchandise credit only (not cash).

Product return of items over one year old shall be subject to a 50% restocking fee. Products ordered more than two years ago will not be accepted.

Freight/Availability

All shipments are F.O.B. Orlando, Florida. Full freight allowance are on shipments totaling **\$2,000.00+ Net Invoice (1 invoice, 1 shipment)**, within the continental United States. Allowance is to be based upon the lowest rate medium of transportation. Normal shipments will be via UPS Ground service or best route, unless otherwise directed. Expedited shipping is available upon request. Contact Hydrotek to determine if additional shipping charges may apply. For product orders with special finishes, call for availability.

Quantity Discounts

For bids, quotes, and quantity discounts, please contact your local Hydrotek Representative (see a list at www.hydrotekintl.com/contact-us/sales-representatives/) or contact the factory.

Payment Terms

Hydrotek's payment terms are: **Net 30 / No Discount** unless otherwise specified. A 1.5% monthly interest charge may be added to all past due invoices.

Please remit to:

Hydrotek International, Inc.
5055 Forsyth Commerce Road, Suite #124
Orlando, FL 32807

The prices contained herein may be subject to change without notice and supersede all previous price lists.

Please see www.hydrotekintl.com/pricing/ for the most current price list available.



Hydrotek International, Inc.

5055 Forsyth Commerce Rd, Ste 124

Orlando, FL 32807

Phone: (800) 922-9883

Fax: (866) 670-5580

www.hydrotekintl.com