



Sensor Faucets and Flush Valves

1000C Series

AC or Battery Powered Sensor Operated Faucet

The 1000C Series faucet is a 4-inch center-set, piston operated sensor faucet that provides a vandal resistant, no touch lavatory solution that promotes better hygiene and energy savings.

- **ADA Compliant.** Meets all barrier free codes
- Conserves water and energy
- Easily installed in new or retrofit applications
- Competitively priced for today's commercial market
- Promotes cleanliness & hygiene
- Proven Hydrotek craftsmanship and reliability

Features

- **ACCU-SENSE** adjustable sensor eyes.
- All solid brass construction.
- Wall mountable, waterproof control box with armored, vandal resistant control and power cables.
- Preset/adjustable sensor range of 6" - 30" for various installation requirements.
- Standard automatic time-out feature. Preset at 20 seconds, but adjustable to OFF, 30, or 60 seconds. Prevents accidental sink overflow.
- Shut-off delay is adjustable from 0.5 (preset) to 8 seconds.
- Solid brass body with cast 4" center-set and 3 point anchoring system. Twist-free and tamper resistant. Adapts to 8" center-set.
- Includes in-line filter with clean-out trap to reduce maintenance costs.
- All parts are field-replaceable to ensure quick and easy repair.
- Adjustable to AC or battery powered (additional part required).
- AC with DC backup models automatically switch to batteries during a power outage
- Slow closing, piston-operated solenoid valve provides reliable and smooth operation without water hammer.
- Superior VSI silicone elastomer piston seals are unaffected by chlorine, chloramines, or ammonia.
- Standard 0.5 GPM Laminar flow control for water conservation and annual savings.
- Control module allows a unique self-check of all electrical components.



Compliances & Certifications



- ADA Compliant
- ASME A112.18.1/CSA B125.1
- NSF/ANSI Standard 372 - Lead Free Certified
- USGBC Member

Available Models

- H-1000C-LR:** Lead Free, AC Powered
- HB-1000C-LR:** Lead Free, Battery Powered
- H-1000C-LRDC:** Lead Free, AC Powered with Battery Backup

Special Finishes

- Polished Brass (-PB)
- Brushed Nickel (-BN)
- Matte Black (-MB)
- Additional Finishes Upon Request



The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com




Sensor Faucets and Flush Valves

1000C Series

AC or Battery Powered Sensor Operated Faucet

Deck Mounted

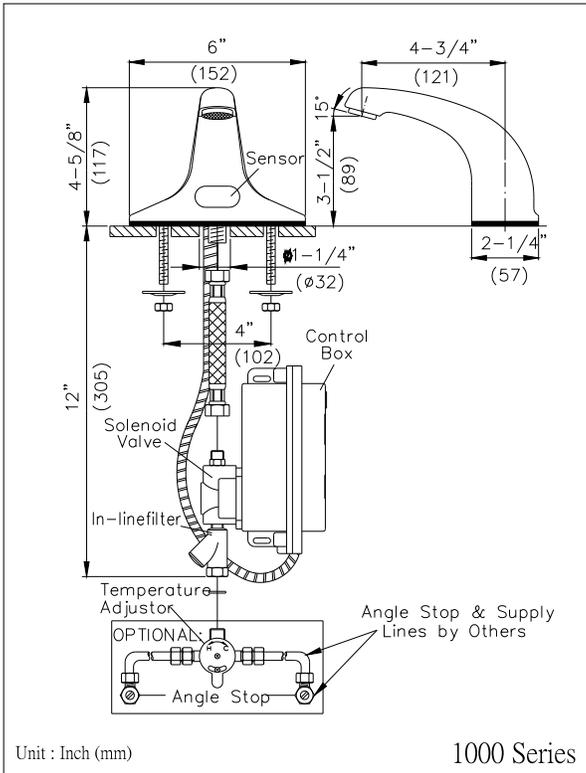

Specifications:

Faucet Construction: Solid brass, chrome plated
 Control Circuit: Solid state, AC or battery, switchable
 Auto. Time-out: Preset at 20 seconds and adjustable to OFF, 30, or 60 seconds
 Line Purge (request only): 2 minute run every 12 hours or 24 hours
 Scrub Mode Delay (request only): 60, 120, 180 seconds
 Sensor Range: Preset and adjustable
 Shut-off Delay: Preset and adjustable from 0.5-8 seconds
 Control Cable: Armored, vandal resistant
 Solenoid Valve: 6V DC, normally closed
 Wattage: 0.4W (idle), 5W (in use)
 Operating Pressure: 5 psi to 125 psi
 Flow Control: 0.5 GPM, vandal resistant

AC Mode

Power Adapter
 Standard Plug-in: Input AC 100-240V, 60 Hz, 0.4A (UL/CSA) Output DC 15V, 0.8A/Class 2
 Power Cable: Armored, vandal resistant
 Optional Multi-Unit: Serves up to 8 faucets (UL/CSA) Input AC 100-240V, Output DC 15V, 3.34A

Battery Mode

Battery Powered Models: (4) AA Alkaline Batteries
 Battery Service Life: 400,000 on/off cycles, up to 4 years

Package Includes:

- (1) Faucet with electronic sensor
- (1) Control box w/6V DC solenoid and control module
- (1) 12V DC plug-in power adaptor (H-1000C and H-1000C-DC only)
- (1) In-line filter with clean-out trap
- (1) Flexible supply tube
- (1) Mounting hardware
- (1) 0.5 GPM vandal resistant flow control
- (4) AA Alkaline batteries (HB-1000C and HB-1000C-DC only)
- (1) Battery holder (HB-1000C and HB-1000C-DC only)

Dimensions:

Base Width (Outside Measurement) 6"
 Base Depth 2-1/4"
 Faucet Height (Aerator to Base) 3-1/2"
 Faucet Height Overall 4-5/8"
 Depth (Center of Aerator to Center of Faucet Base) 4-3/4"
 Mounting Bolt Length 2-1/2"
 Mounting Type Three hole, 4" Centerset

Optional Variations and Accessories

- 1.5 GPM VR Soft-Flow Aerator; 0.35, 1.5 & 2.2 GPM Laminar Flow
- 8" Centerset Cover Plate
- HC-010 Multi-Unit Voltage Adapter (AC Powered Only) - 8 units
- HC-001 Mixing/Check Valve (Mechanical)
- HBL-03-LR Thermostatic Mixing Valve with Checks (Lead Free)
- Watersense Labeled Flow Control by Neoperl available

The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com