



Sensor Faucets and Flush Valves

HM-8500 Series

Manual Flush Valve (Urinal)

Description

Polished chrome finish, single flush, exposed manual urinal flushometer

Specifications

Exposed, Piston Operated, Chrome Plated, Urinal Flush Valve with the following features:

- Left/Right rough-in
- Rough-in dimension: 11-1/2" (292mm)
- Piston valve mechanism
- 3/4" I.P.S. Angle stop valve with vandal resistant cap
- Sweat solder adapter with cover tube and wall flange
- Spud coupling and flange for 3/4" top spud
- Adjustable tailpiece
- High back pressure vacuum breaker/flush tube connection
- Superior VSI silicone elastomer piston seals are unaffected by chlorine, chloramines, and ammonia
- High copper, low zinc brass casting for dezincification resistance
- Operating pressures: 20-125 PSI
- Standard self-cleaning filtering system



Available Models


- ☐ HM-8500-1.0 GPF Urinal flushometer
- ☐ HM-8500-0.5 GPF Urinal flushometer, Watersense Listed*

Compliances & Certifications



- ADA Compliant
- ASME A112.18.1/CSA B125.1
- ICC-ES Listed & Certified
- USGBC Member
- WaterSense Listed*—select flow rates

Rough-in Dimensions

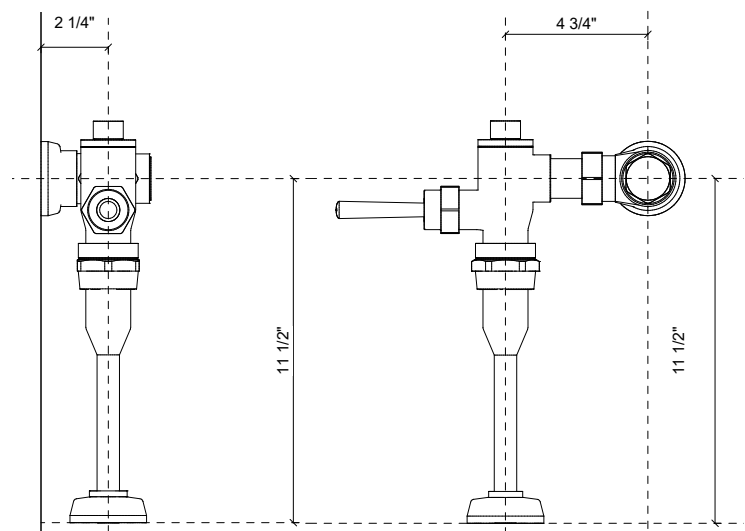

The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com