Hydrotek


Sensor Faucets and Flush Valves

HM-8500R Series

Retrofit Manual Flush Valve (Urinal)

Description

Polished chrome finish, single flush, exposed retrofit manual urinal flushometer

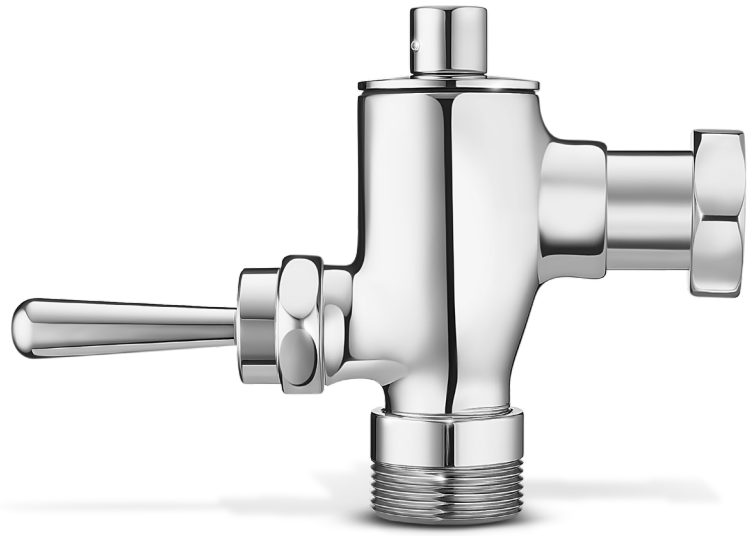

Specifications

Exposed, Piston Operated, Chrome Plated, Urinal Flush Valve with the following features:

- Left/Right rough-in
- Piston valve mechanism
- Superior VSI silicone elastomer piston seals are unaffected by chlorine, chloramines, and ammonia
- High copper, low zinc brass casting for dezincification resistance
- Operating pressures: 20-125 PSI
- Standard self-cleaning filtering system

Available Models

☐ HM-8500-R1.0 Retrofit Urinal flushometer, 1.0 GPF


☐ HM-8500-R0.5 Retrofit Urinal flushometer, 0.5 GPF Watersense Listed*

Compliances & Certifications

ADA Compliant

- ADA Compliant
- ASME A112.18.1/CSA B125.1
- ICC-ES Listed & Certified
- USGBC Member
- WaterSense Listed*—select flow rates

Rough-in Dimensions

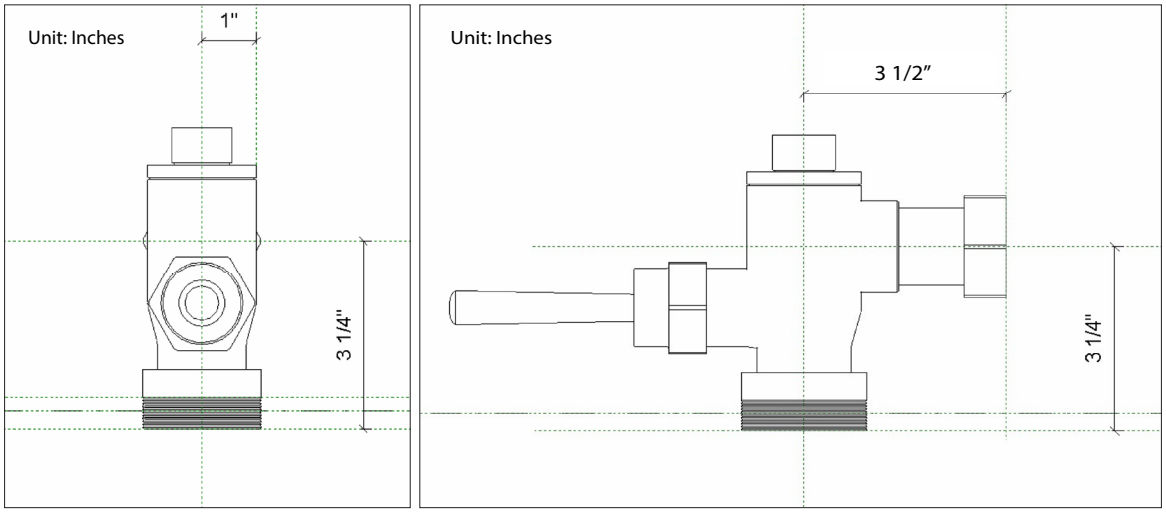

The information contained within this document subject to change without notice

5055 Forsyth Commerce Rd Ste 124, Orlando, FL 32807

Phone: 800.922.9883 | Fax: 866.670.5580 | hydrotekintl.com

Revised 10/20/26